

Ref 8505612
8005612
Vers.2

Bûcher Colombus

1200x800x1700 mm



Traitement

Pour assurer la pérennité du bois en extérieur, nous traitons nos produits en autoclave. Ce procédé d'imprégnation du bois par vide et pression permet d'avoir un traitement du bois par des agents conservateurs non toxiques. Ce traitement permet au produit d'être protégé contre les insectes, les pourritures, les champignons et les termites dans les conditions d'utilisations de sa classe (III ou IV).

Entretien

Le bois est un matériau naturel vivant, dont les dimensions, aspects, masses, formes et teintes peuvent évoluer, sans modifier les propriétés ni la fonctionnalité et la qualité du produit. Le bois subit un processus de grisaillement naturel au fil du temps qui nécessite un entretien régulier.



Entretien à l'eau 1 fois/an contre les éventuelles traces de mousse.



Possibilité de raviver la couleur avec un dégriseur et d'appliquer 2 nouvelles couches de lasure aqueuse 1 fois/an sur les produits lasurés.

Retrouvez nos outils & conseils sur www.cerland.com

Treatment

To ensure the sustainability of wood outdoors, we treat our product with autoclave process. This impregnation process of wood by pressure and vacuum allows a wood treatment by non-toxic preservatives. This treatment allows the product to be protected against insects, rot, fungi and termites in the conditions of its class of uses (III or IV)

Maintenance

Wood is a living natural material, the dimensions, aspects, weights, shapes and colors may change without changing the properties or functionality and quality of the product. Wood suffered a natural greyish tinge over time which requires maintenance.

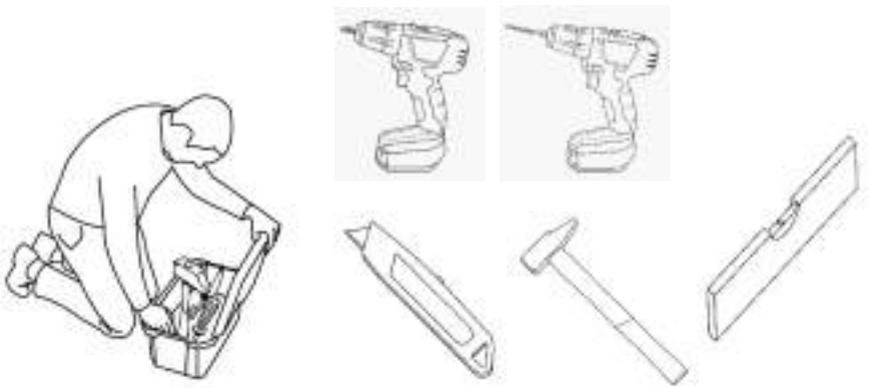


Maintenance with water 1time/year against any traces of foam.



Possibility to revive the color with dégriseur and apply 2 new aqueous glaze layers 1time/year on the product.

Find our tools & tips on www.cerland.com



x2



01:30







?



www.cerland.com


Blister ref : S06437













I		$\phi 4 \times 40$	x205
II		$\phi 4 \times 70$	x2
III		$\phi 3 \times 40$	x10

Pré-perçage / Pre-drilling / Vorbohren / Perforacion previa

ϕ Vis / ϕ Screw / ϕ schraube / ϕ Tornillo	ϕ Percage/ ϕ Drilling / ϕ Bohrung/ ϕ Perforacion
$\phi 4$ (I & II)	$\phi 3$

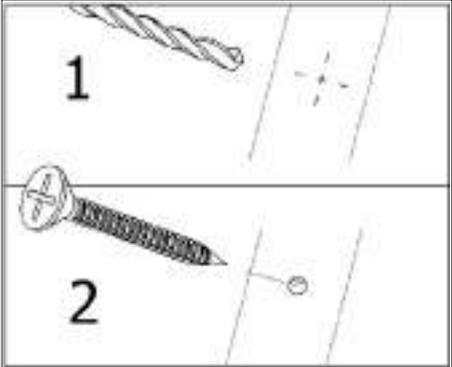

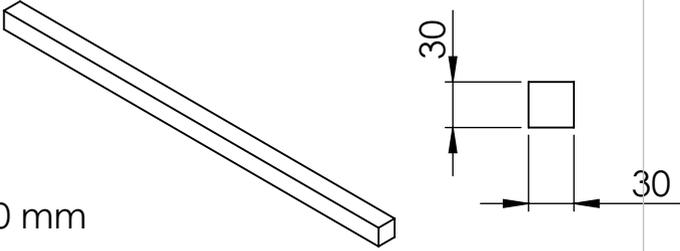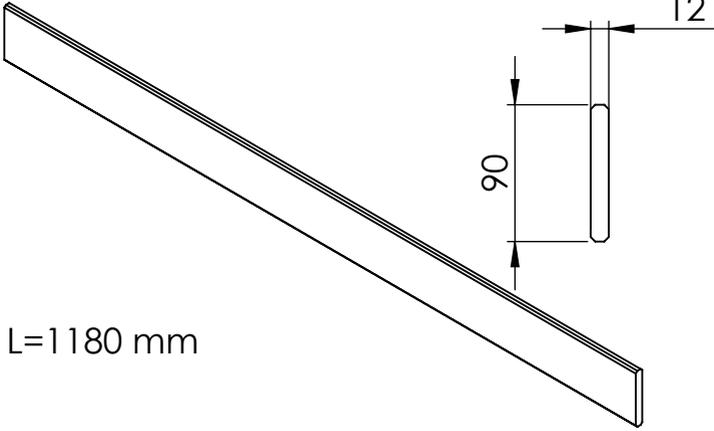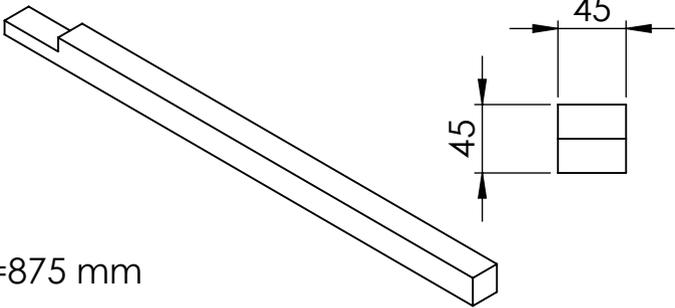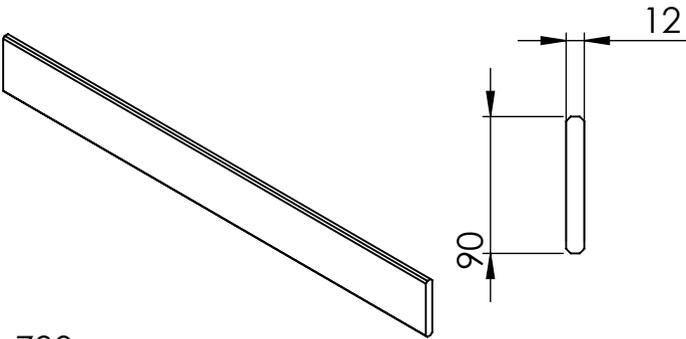
<p>A</p> <p>S56444</p>	<p>L=700 mm</p> 	<p>x4</p>
<p>B</p> <p>S56445</p>	<p>L=1180 mm</p> 	<p>x18</p>
<p>C</p> <p>S56452</p>	<p>L=875 mm</p> 	<p>x8</p>
<p>D</p> <p>S56446</p>	<p>L=790 mm</p> 	<p>x22</p>
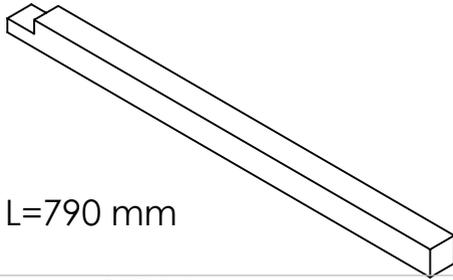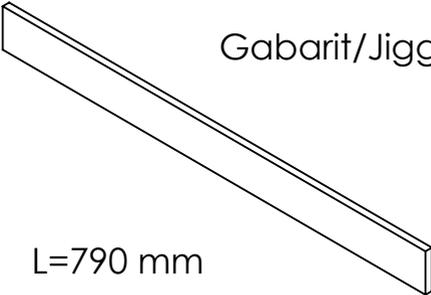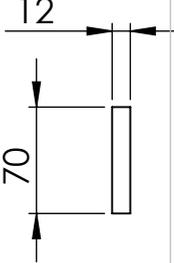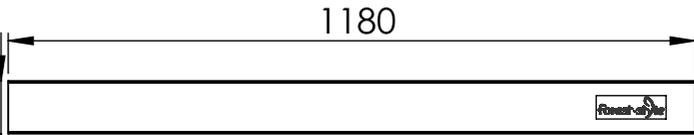
<p>E S56447</p>	 <p>L=790 mm</p> 	<p>x2</p>
<p>F S06450</p>	 <p>1000x2450 mm</p>	<p>x1</p>
<p>G S56453</p>	 <p>Gabarit/Jigg</p> <p>L=790 mm</p> 	<p>x1</p>
<p>J S56472</p>	 <p>1180</p> <p>90</p> 	<p>x1</p>

1/9

x4

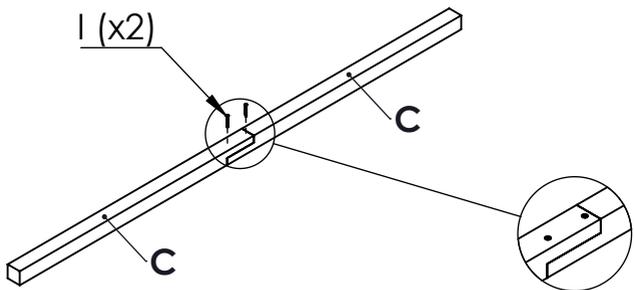
C (x8)
I (x8)



2/9


x2

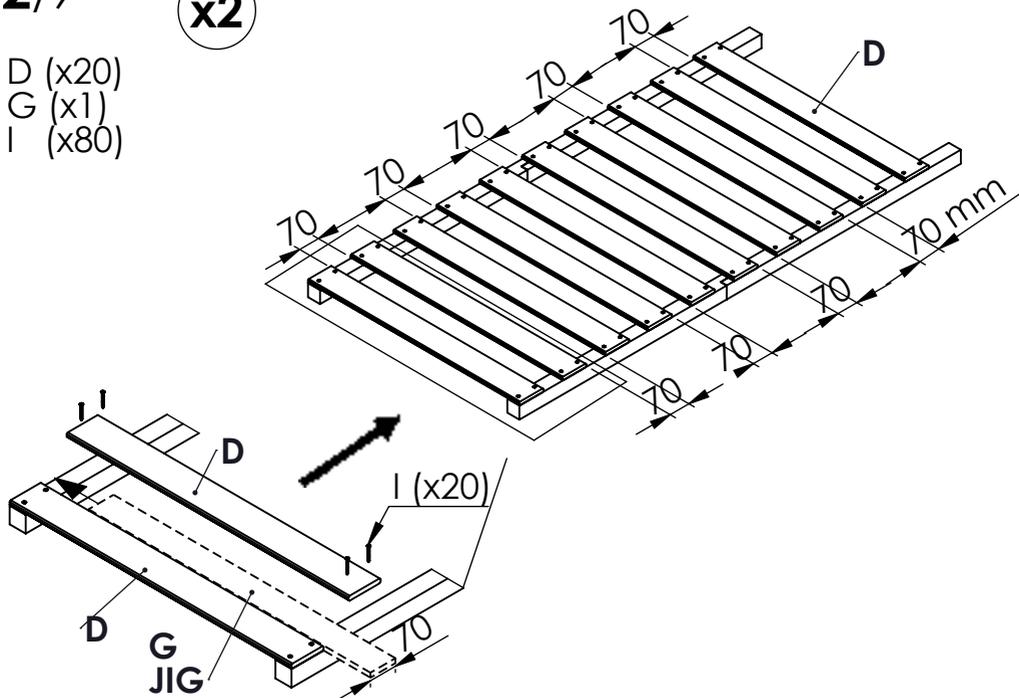D (x20)
G (x1)
I (x80)




3/9

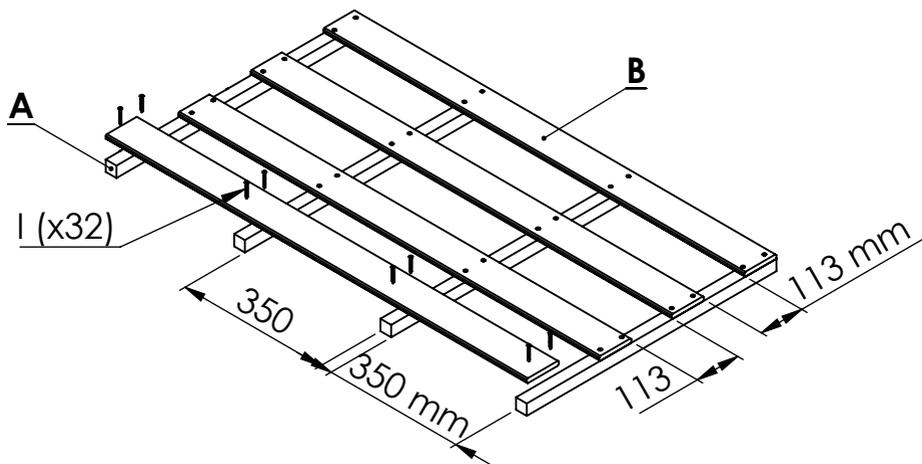A (x4)
B (x4)
I (x32)




4/9

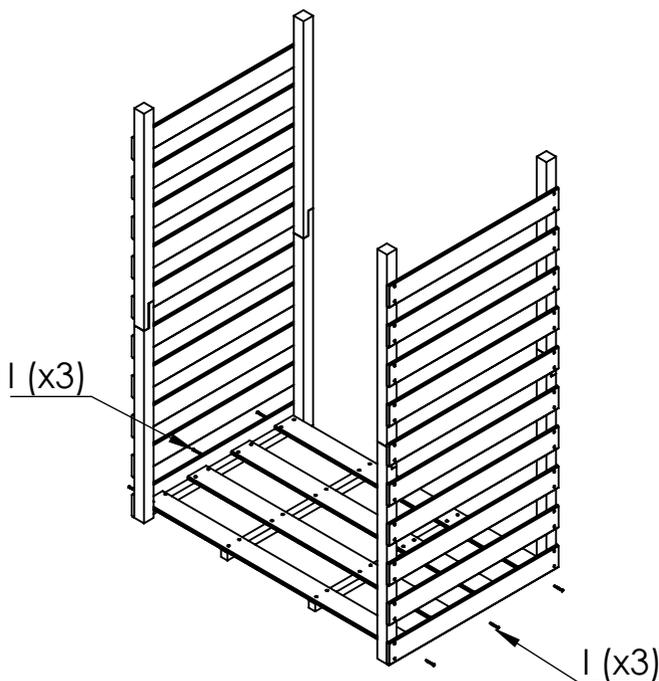I (x6)




5/9

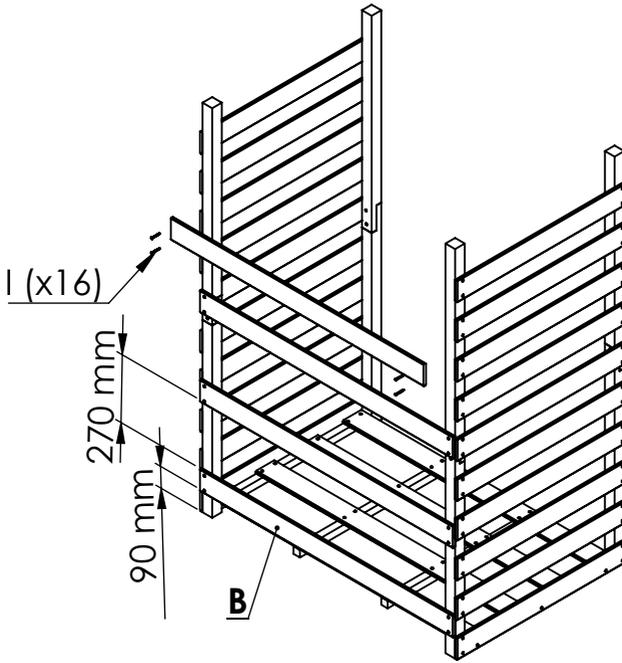- B (x4)
- I (x16)




6/9

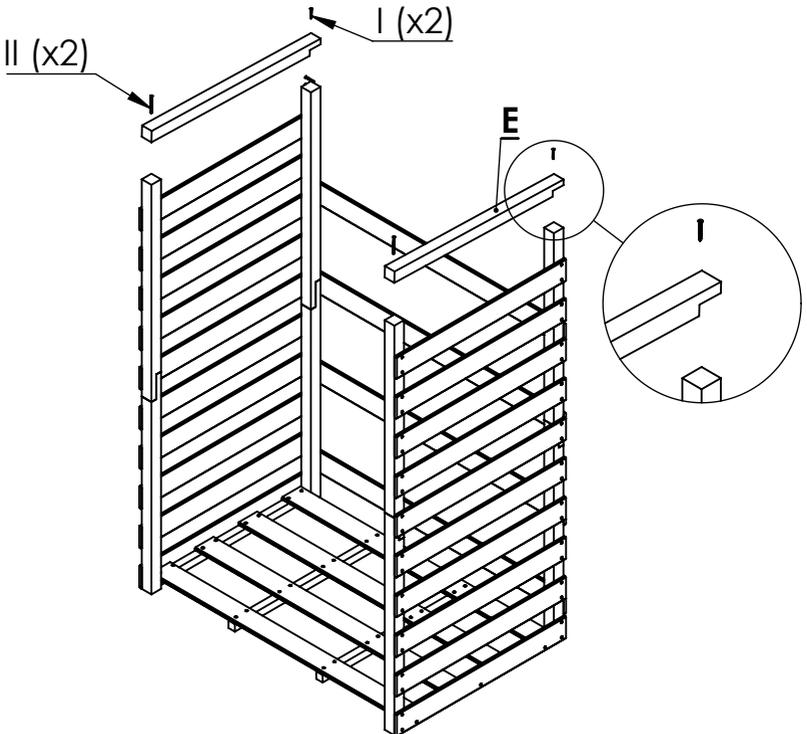- E (x2)
- I (x2)
- II (x2)




7/9

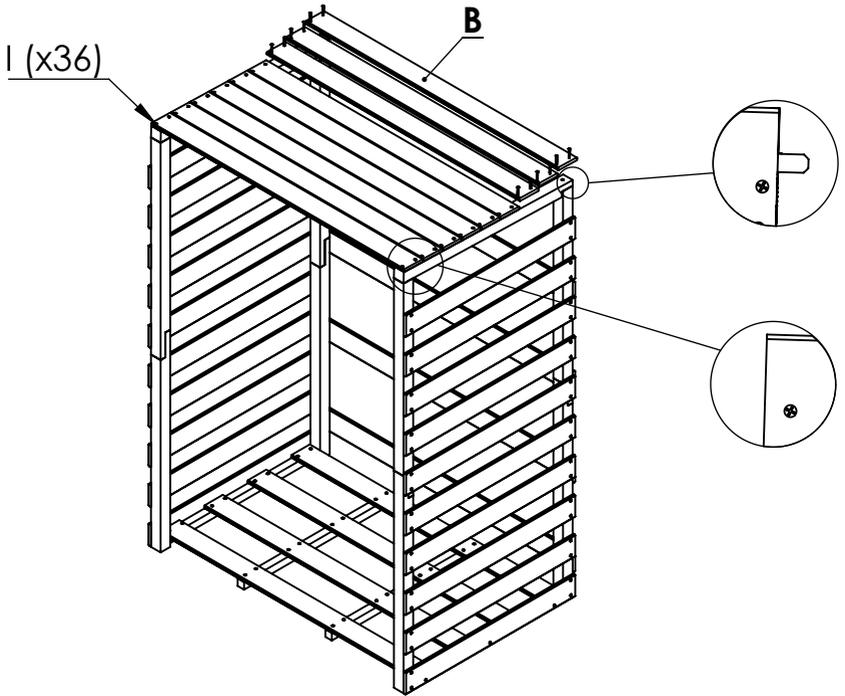B (x9)
I (x36)



8/9

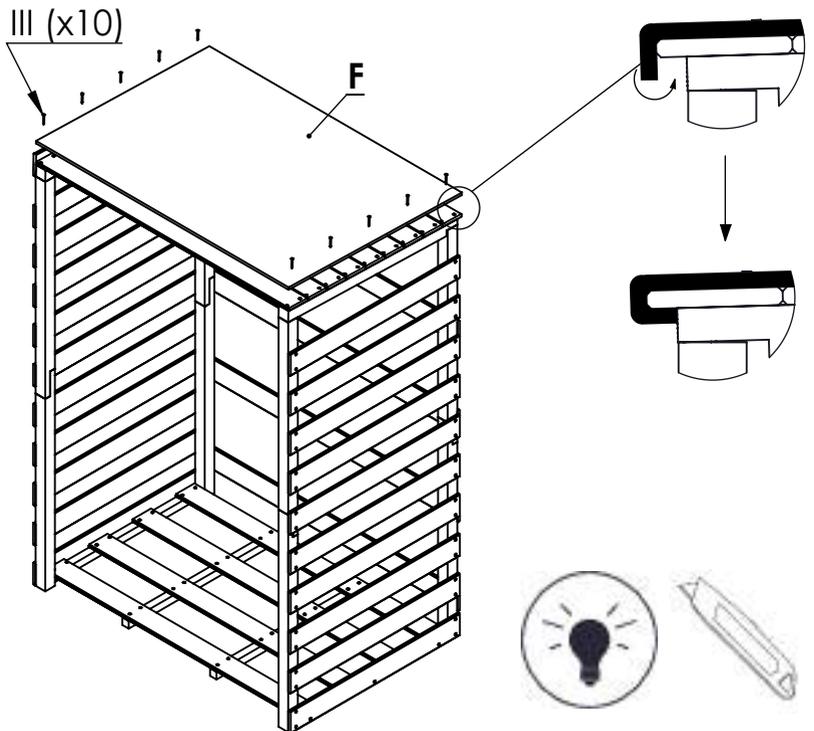F (x1)
III (x10)



9/9

B (x1)
J (x1)
D (x2)
I (x16)

